

09/600447

416 Rec'd PCT/PTO 17 JUL 2000

LEVINE & MANDELBAUM

ATTORNEYS AT LAW
EMPIRE STATE BUILDING
SUITE 7814
350 FIFTH AVENUE
NEW YORK, N.Y. 10118

ALAN H. LEVINE

HOWARD F. MANDELBAUM

PATENTS AND TRADEMARKS

TELEPHONE: 212-239-4162

TELECOPIER: 212-629-4204

July 17, 2000

BY EXPRESS MAIL NO. EMO49966451US

Box PCT

FEE

Commissioner for Patents
Washington, DC 20231

Re: National Stage of PCT/IB99/00046
Universal Signal Distribution System
Polo Filisan
Our Ref: METR0260US

Sir:

Transmitted herewith for filing under 35 U.S.C. 371 are:

1. Copy of the specification for PCT International Application No. PCT/IB99/00046 published by WIPO under International Publication No. WO 99/37092 on July 22, 1999, including drawings;
2. Copy of International Preliminary Examination Report with attached amended sheets;
3. Inventor's Declaration (to be executed) identifying the inventor and his attorneys;
4. Check No. 2656 in the amount of \$970.00 for basic national fee.

It is requested that the enclosed self-addressed postcard be stamped with the official dating stamp of the U.S. Patent and Trademark Office and returned. If the enclosed papers are considered incomplete in any way, it is also requested that the

09/600447

Commissioner for Patents
Re: National Stage of PCT/IB99/00046

July 17, 2000

Page 2

532 Rec'd PCT/PTC 17 JUL 2000

undersigned be advised by collect telephone call to (212) 239-4162 immediately upon receipt of this correspondence.

Any unpaid fee or balance in connection with this correspondence may be charged to deposit account no. 06-0735. A duplicate of this authorization is enclosed.

Respectfully submitted



Howard F. Mandelbaum
Registration No. 27,519
Attorney for Applicant

HFM:cnt
enc.

09/600447
PCT/IB99/00046
National Stage
of PCT/IB99/00046
July 17, 2000
Page 2
HFM:cnt
enc.

#1
CBH
09/10/00

LEVINE & MANDELBAUM

ATTORNEYS AT LAW
EMPIRE STATE BUILDING
SUITE 7814
350 FIFTH AVENUE
NEW YORK, N.Y. 10118

ALAN H. LEVINE

HOWARD F. MANDELBAUM

PATENTS AND TRADEMARKS


TELEPHONE: 212-239-4162

TELECOPIER: 212-629-4204

CERTIFICATE OF MAILING

I certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner for Patents, Washington D.C. 20231 on October 25, 2000.

Dated: October 25, 2000



Howard F. Mandelbaum

Box PCT
Commissioner for Patents
Washington, DC 20231Re: U.S. Patent Application Serial No. 09/600,447
Universal Signal Distribution System
Polo Filisan
Our Ref: METR0260US

11/02/2000 ERMANDO 00000032 09600447

01 FC:154
02 FC:966130.00 OP
594.00 OP

Sir:

Transmitted herewith for filing in the above referenced patent application which was filed in accordance with Rule 1.53 are the following:

- Notification of Missing Requirements Under 35 U.S.C. 371 in the United States Designated/Elected Office (DO/EO/US)
- Executed inventor's declaration
- Executed assignment with cover sheet for recordal
- Request for Extension of Time
- Credit Card Payment Form (PTO-2038) in the amount of \$1,136.00, computed as follows:

Basic National Fee:	Previously paid
Independent claims in excess of 3:	None
Multiple dependent claims:	None
Total claims in excess of 20: 33 @ \$18.00	\$594.00
Late filing of declaration:	\$130.00
Assignment recordal fee:	\$40.00
Two months extension of time	\$390.00
	<u>\$1,154.00</u>

UNIVERSAL SIGNAL DISTRIBUTION SYSTEM**DESCRIPTION**

The present industrial invention refers to a distribution system of a plurality of television signals, and/or audio signals, in particular pertaining to different standards, in a condominium and/or community environment. By condominium is meant a block of flats, and by community a block of one or several buildings.

- 5 Development of digital technology, in particular of signal compression techniques, has led to the introduction of digital television by terrestrial, cable and satellite transmission. Digital television offers the advantage of a wider programs availability (for instance, 4 to 6 digital programs can in fact be allocated in the frequency band occupied by an analog channel), and implementation of the new so-called interactive
- 10 services, such as video on demand, called VOD (Video on Demand) or NVOD (Near Video on Demand). Obviously, different equipments from those used for analog signals are required to receive such new digital signals, which may lead to conflicting interests, for instance among the residents in a condominium or community.
- 15 Many users, in fact, wish to have access to the new programs and services available, while other users - either due to their lack of interest towards novelties or for financial reasons - make recourse to condominium management rules, which impose the majority's approval to implement such novelties, also considering that a high uncertainty still exists about their real cost/benefits ratio. Further inconveniences are
- 20 introduced by the fact that said interactive services also require for the distribution system to be capable not only of receiving signals from the provider, the so-called downstream signals, but also capable of transmitting signals to the provider, the so-called upstream signals.

Moreover, in most cases, both the programs and interactive services are supplied

25 against payment, through a conditioned access system managed by the broadcaster

and based on the use of smart cards, where each user should be able to operate on the distribution system through smart cards, in order to decode the programs purchased under exclusivity.

Now, installation complexity for the systems already known will obviously increase
5 to a considerable extent due to all these further functions required for the distribution system.

The present invention has the aim of providing a distribution system which, by solving the above drawbacks, allows for the distribution of a plurality of services in a condominium and/or community environment, independently from the type of
10 standards of the signals received and the time when such signals become available; which also allows gradual implementation of the system based on the free decision of each individual user, obviously without affecting the service already supplied by the system.

A further aim of the present invention is to provide a distribution system of digital
15 signals in a condominium and/or community environment, which allows each user to use said digital signals in a bi-directional way, without affecting the service already supplied by the system.

A further aim of the present invention is to provide a fast installation of the system associated with the use of a smart card, while protecting the broadcaster's interests
20 and the user's privacy.

In order to achieve such aims, it is the object of the present invention a distribution system in a condominium and/or community environment incorporating the features of the annexed claims, which form an integral part of the present description.

Further objects and advantages of the present invention will become apparent from
25 the following detailed description and annexed drawings, which are supplied by way of non limiting example, wherein:

- Fig. 1 shows the subdivision of the frequency band used for the signal distribution;

- Fig. 2 shows a known distribution system of a plurality of signals in a condominium and/or community environment;
- Fig. 3 shows a distribution system of a plurality of signals in a condominium and/or community environment according to the invention;
- 5 - Fig. 4 shows a first variant embodiment of the distribution system of a plurality of signals in a condominium and/or community environment according of Fig. 3;
- Fig. 5 shows a detail of the first variant embodiment represented in Fig. 4;
- Fig. 6 shows a second variant embodiment of the distribution system of a plurality of signals in a condominium and/or community environment represented in Fig. 3;
- 10 - Fig. 7 shows a possible frequency subdivision of the signals used for the second variant embodiment represented in Fig. 6;
- Fig. 8 shows a third variant embodiment of the distribution system of a plurality of signals in a condominium and/or community environment represented in Fig. 3.

Figure 1A shows schematically the frequencies spectrum used for signals distribution; specifically, the band up to 40 MHz is engaged by the CATV return channels (Cable TV) for communications exchange between the user and the service supplier; 47-68 MHz and 174-230 MHz bands contain the television channels pertaining to the 1st VHF band and 3rd VHF band, respectively; UHF television channels are allocated in the 470-862 MHz band. Both the 110-174 MHz and 230-445 MHz bands are partially used for the distribution of CATV channels and converted satellite channels. The 230-445 MHz band is also known as extended S band. VHF bands are subdivided into 7 MHz wide channels, whereas CATV and UHF channels are 8 MHz wide, as shown schematically in Fig. 1C. Figure 1B shows schematically a particular use of the spectrum in the range of 41-46.5 MHz, which will be described in the following.

Figure 2 shows a known system for the reception and the distribution of signals. Number 1 indicates a set of aerials for receiving VHF and UHF signals amplified by means of channel amplifiers, represented by block 2, and subsequently sent to a

mixer 3 and then distributed. Number 4 indicates an aerial to receive satellite signals, which are notoriously transmitted in the band around 12 GHz in 27 MHz wide channels, with an FM modulated carrier. Block 5 represents a so-called LNB (Low Noise Block) of the universal type, which amplifies and convert in the first
5 intermediate 0.950 - 2.050 GHz frequency both the analog signals in 27 MHz channels and the digital signals in 36 MHz channels. Block 6 reveals the FM signals, which are thus AM remodulated and converted in VHF, UHF or extended S band channels by block 7.

The signals are then sent to the mixer 3 and then distributed. The lines indicated with
10 8 represent the entries to the various flats consisting of a coaxial cable; number 9 indicates the signal sockets available in the flats, whereas 10 indicates a user terminal, in the specific instance a television set receiver that can be operated by a remote control 11.

Figure 3 represents a distribution system of a plurality of signals in a condominium
15 and/or community environment according to the present invention, where the possibility of receiving both the analog television signals and new digital signals is considered. It has to be noticed that the blocks indicated with the same reference number in Fig. 2 and Fig. 3 perform the same functions; thus, blocks 4 and 5 are used to receive both the analog and digital signals from satellite. In Fig. 3, blocks 6 and 7
20 shown of Fig. 2, specifically related to analog signals, are omitted for clarity's sake.

In the diagram shown in Fig. 3 three different types of received digital television signals are indicated; however the following description applies for any digital signals, such as the DAB signal (Digital Audio Broadcasting) for digital radio broadcasting, or a data carrying signal, or a video signal in general. By the set of
25 aerials 19 the terrestrial digital television signals are received, which according to DVB Specifications (Digital Video Broadcasting) have COFDM modulation (Coded Orthogonal Frequency Division Multiplexing) and are transmitted through the same channel system for VHF and UHF analog signals.

The block 14 receives, through a coaxial cable 14', the digital CATV signal, being QAM modulated (Quadrature Amplitude Modulation) in 8 MHz channels, whereas as mentioned above the aerial 4 receives digital signals from satellite, being QPSK modulated (Quadrature Phase Shift Keying). It will be appreciated that the above
5 digital, terrestrial, satellite and cable signals are modulated in different modes (COFDM, QPSK, QAM, respectively), so that three different types of demodulators are required for their use. Typically, transmission of either QAM or QPSK modulated digital signals is performed under SCPC procedures (Single Channel Per Carrier), whereas transmission of digital television signals as provided by the DVB
10 standard (Digital Video Broadcasting) occurs under MCPC procedure (Multi Channel Per Carrier).

At the entry of every flat or building an S band-stop filter, being represented by blocks 15, is connected in series with the distribution cable, i.e. a filter blocking the passage of signals comprised within a predetermined band, thus hindering their
15 reception inside the flat or building. Therefore, this band is a reserved band within the distribution in a condominium and/or community environment, being inhibited to all users who do not wish to receive new signals. Obviously, in order to ensure the pre-existing service, all analog signals have to be distributed in channels not comprised in the above reserved band, and this can be easily obtained using the
20 known frequency conversion technique. It is clear that the above reserved band may consist of several parts and in this case the filter 15 inhibits the flow of signals in several bands, for example in the extended S band and the 110-174 MHz band. In order to avoid possible interferences, it is appropriate to have the band-stop filter also inserted at the output of block 2. The so modified system represents the basic
25 structure for subsequent implementations.

Should one or more users in fact decide at a certain time to have access to new digital signals, for each user the following devices would have to be installed, which will be added without modifying the existing system:

1. A transponder preselection circuit, indicated by block 12 in Fig. 3, for selecting one of the four bands exiting the LNB (high band, low band, horizontal polarization and vertical polarization). As known, the transponder is a frequency amplifier and converter device, irradiating signals from the satellite.

5 2. A QPSK/QAM transmodulator, indicated by block 13, which selects the digital signal from satellite, demodulates it, remodulates it in QAM and converts it into a predetermined channel for the sole use of a single user among those who have accepted the system implementation (practically, a personal channel being comprised in the above reserved band); this channel has preferably an 8 MHz
10 band width. The signal is then sent to the mixer 3. Substantially, the reserved band is subdivided into a plurality of channels being available to the users wishing to receive new signals.

15 3. A COFDM/QAM transmodulator, indicated by block 20, which selects a terrestrial digital television signal, demodulates it, remodulates it in QAM, converts it into the above reserved channel and sends it to the mixer 3.

4. A block 14, which selects the CATV digital signal, converts it into the above personal channel and sends it to the mixer 3.

20 5. A selective channel-pass filter, indicated by block 16 which, arranged in parallel to the band-stop filter, allows the user to receive his own personal channel. The symbol + indicates a signals adder.

6. A QAM demodulator, which may be contained in an appropriate module, or belong to the IRD receiver-decoder 18 (Integrated Receiver Decoder), as indicated in Fig. 3.

25 7. A user terminal, indicated by block 17, which represents the interface between the distribution system and the user. Through said terminal the user is able, by operating on modules 12, 13, 14 and 20, to select the source and the desired channel to be sent to the personal channel, and adjust various parameters, such as satellite type, signal polarization, QAM signal level, sending appropriate controls

through a return-channel, as described in the following.

If, for instance, the reception of a determined digital channel from satellite is desired, the user will operate on the preselector 12 to choose the band and will enable the output of block 13 towards the mixer 3, whereas the outputs of blocks 14 and 20 towards the mixer 3 are locked.

The user terminal 17 can either be an independent block or, as in Fig. 3, communicate with the IRD receiver indicated by block 18, which QAM demodulates the digital signal, decodes it and sends it to the television set not shown in the figure. In this instance, the user terminal and the IRD receiver may be controlled through the same remote control 11.

8. A return-channel module, which may be contained in the user terminal 17 as shown in Fig. 3 and allows the user to control blocks 12, 13, 14 and 20. In case of low bit rates, i.e. 9.6 Kbit/s and multiples up to 48 Kbit/s, either FSK (Frequency Shift Keying) or PSK (Phase Shift Keying) modulation may be used, which are allocated to a 128 KHz wide channel, so as to have the same minimum band width as provided by the DVB-RC standard on the return-channel. Should higher bit rates be requested, then 18 KHz multiple band widths can be used as provided in said standard, ranging from a minimum of 256 Kbit/s bit rate with a 128 KHz band up to 3.088 Mbit/s with a 1.544 MHz band using QPSK modulation, and up to 12.8 Mbit/s with a 3.2 Mhz band using QAM modulation 16. Information sent on the return channel may eventually go further than the respective transmodulator and be sent outside the building in many ways (telephone line, by satellite, etc.). Control instructions for the transmodulator may use packets as provided in the DVB-RC standard. The return channel may be allocated to the frequency band directly below the television channels band, for example within the range 41-46.5 MHz according to the European B standard, as shown in Fig. 1B. Said return channel can be a bi-directional channel, i.e. a transmodulator, upon receiving a control from the user terminal 17, can reply by giving the user

terminal 17 confirmation of the performed operation, or supplying other data as requested. In any event, it is also possible that the transmodulator starts a communication on the return channel, for instance when the installer is in the loft and wants to change some parameters of the IRD receiver 18. Bi-directional communication is performed under TDMA procedure (Time Division Multiplexing Access). Obviously, each user shall have his own personal return channel. Advantageously, this signal can be sent through the common distribution coaxial cable of the system.

By the system described above, a single user may, along with analog signals, also have in his flat a digital signal of his own choice containing 4 to 6 programs, each one being receivable from an IRD in an independent mode. In order to have simultaneous availability of two digital channels, another personal channel with its associated transmodulators and channel-pass filter need to be installed; of course, availability of at least two IRDs is also required.

The condominium and/or community distribution system of a plurality of signals described above offers a high flexibility and can freely accept subsequent gradual implementations, without causing any conflicts with the rules governing the condominium or community.

The distribution system of a plurality of signals in a condominium and/or community environment according to the present invention offers a further advantage in that the same system wired for analog signals can also be used for the new signals distribution, i.e. without requiring a new wiring setup.

Moreover, the single user only requires one demodulator for digital signals, as these signals are all QAM remodulated before their distribution. In addition, such a transmodulation drastically reduces the problems of interferences, signals equalizations and intermodulation, being usually present in the case of a multistandard distribution.

The signals distribution system shown in Fig. 3 requires installation, for each new

user wishing access to new digital signals (for example those irradiated by satellite), of a proper transmodulator 13 for each signal pertaining to a different standard, said transmodulator 13 comprising at least a tuner for selecting the signal, a demodulator, a QAM modulator and a frequency converter.

- 5 In view of costs, it will be noticed that for each user an equal number of transmodulators is required, bound to the number of digital signals with different standards to be received.

Therefore, in Fig. 4 the diagram of a variant embodiment of the distribution system of a plurality of signals in a condominium and/or community environment of Fig. 3

- 10 is shown, which comprises a modified transmodulation device.

In the embodiment of Fig. 4, instead of sending each digital signal to a different transmodulator 13, 14, or 20, the digital signals are sent to a sole “universal” transmodulator, represented by block 29; the remaining blocks shown in Fig. 4 with the same reference number have the same function of the blocks already shown in Fig. 3.

As it will be appreciated, Fig. 4 shows three different types of received digital television signals; however, the following description applies for any digital signal, such as the DAB (Digital Audio Broadcasting) signal for digital radio broadcasting and/or a data carrying signal and/or a video signal in general.

- 20 Once transmodulators 13, 14 and 20 of Fig. 3 are replaced by the transmodulator 29 of Fig. 4, the remaining portion of the distribution system of a plurality of signals in a condominium and/or community environment will operate in the same way.

A way to provide the block 29 is detailed in Fig. 5, where the block 30 represents a tuner for selecting, in the QPSK range 950-2150 MHz, satellite digital channels

- 25 QPSK modulated and properly preselected in the block 12; the digital channel selected in block 30 under the user’s control is then demodulated by a QPSK demodulator represented by block 31.

Block 32 represents a tuner for the selection of the QAM modulated digital channels

received by cable in the range 5-862 MHz; the digital channel tuned by the block 32 under the user's control is then demodulated by a QAM demodulator represented by block 33.

Block 34 represents a tuner for the selection, in the range 47-862 Mhz, of COFDM modulated terrestrial digital channels; the digital channel tuned by the block 34 under the user's control is then demodulated by a COFDM demodulator represented by block 35.

Block 36 represents a commutator, receiving the digital signals demodulated in the demodulators 31, 33, 35; one of these three signals selected by the user through the block 17 is present at the output of block 36. This signal is QAM remodulated by a QAM modulator, represented by block 37, and then converted by a converter represented by block 38 into the above said personal channel for the exclusive use of a single user, which is comprised in a frequency band ranging from 47 to 862 MHz, preferably 230 to 445 MHz. Each user is therefore the owner of a universal transmodulator 29, containing a converter with a fixed frequency output channel for his own personal use. The signal is then sent to the mixer 3 to be distributed as previously described.

It has to be appreciated that demodulation and remodulation of the QAM signal, which are apparently superfluous operations, are performed to recover the bit error rate eventually introduced by the cable distribution.

It should also be noticed that the system still provides for a "return channel" module, which can be contained in the interface or user terminal 17, allowing the user himself to send a selection control signal to blocks 12, 30, 32, 34 and 36 using a signal being preferably FSK or PSK, allocated to a channel, for example in the range 41-46.5 MHz. Advantageously, this signal can be sent through the common distribution coaxial cable of the system.

As it can be assumed from the above description with reference to Fig. 5, through a proper grouping of several specific functions within a single device, i.e. the

transmodulator 29, it is then possible the use for each individual user only one modulator 37 and one converter 38, instead of three modulators and three converters as described with reference to Fig. 3.

It should also be noticed that the above universal transmodulator 29 can be advantageously used both for a signals distribution system in a condominium and/or community environment and in the instance of a single system.

The various parts of the universal transmodulator 29, i.e. the selection means 30, 32, 34, 36, the demodulation means 31, 33, 35, the modulation means 37 and the conversion means 38, can be obviously be housed in one same container, with clear practical advantages, also in view of the system installation and the reduction of its composing elements.

The distribution system of a plurality of signals in a condominium and/or community environment represented in Fig. 3 or Fig. 4 operates only on the so-called downstream signal, i.e. the signal received by the provider or broadcaster, whereas it does not allow the user to operate for transmitting an upstream signal to the provider.

Fig. 6 therefore represents the diagram of another variant embodiment of the distribution system of a plurality of television signals in a condominium and/or community environment shown in Fig. 3. In this figure, the blocks related to both terrestrial analog and digital television signals are omitted; moreover, the remaining blocks of Fig. 6 indicating the same reference number have the same function of the blocks already shown in Fig. 3.

Compared to Fig. 3, five new blocks indicated with 40, 41, 42, 43 and 44, respectively are shown in Fig. 6, which will now be described in detail.

Block 40 represents a terminal, used by the user to transmit upstream type signals US and receive downstream type signals DS, which is directly connected to the interface 17 previously described with reference to Fig. 3.

Said terminal 40 performs the following known functions:

- personal computer function, for elaborating the upstream signals US to be

transmitted and the received downstream signals DS;

- encoder function, for encoding the upstream signals US to be transmitted;
- QAM modulator function, for modulating the upstream signals US to be transmitted;
- 5 - SCPC type QAM tuner function, for the reception of the downstream signals DS;
- QAM demodulator function, for demodulating the downstream signals DS;
- decoder function, for decoding the received downstream signals DS.

Downstream signals DS being received and upstream signals US being transmitted by block 40 are allocated to the above personal channel for the exclusive use by the user, as explained in the following.

The distribution system of a plurality of digital signals in a condominium and/or community environment uses the satellite to send the return signals towards the provider. Therefore, the upstream signal US is sent, through the interface 17, the filter 16, the cable 8 and the mixer 3, from the block 40 to an SCPC transmodulator indicated by the block 40. The latter, which demodulates said upstream signal US according to QAM coding, remodulates it according to the QPSK coding in accordance with the SCPC procedure, then convert said upstream signal US in a frequency being compatible with the frequencies available in a satellite channel, and finally send it to the aerial 4 for its transmission to the satellite. The downstream signal DS being received by the aerial 4 is sent to a transmodulator 42 which, besides the function pertaining to the block 13 of Fig. 3, also operates as a tuner for the multimedial signals QPSK modulated in accordance with the SCPC procedure, being received from a satellite channel; as a result the downstream signal DS being received at the block 42, upon reception of a proper control sent by block 40, is demodulated in QPSK under SCPC procedure, remodulated in QAM coding and converted into a frequency band contained in the above personal channel. Thus, the downstream signal DS reaches the block 40, through the mixer 3, the cable 8, the filter 16 and the interface 17.

If the distribution system of a plurality of digital signals in a condominium and/or community environment uses cable transmission, the upstream signal US is sent by block 40, through blocks 17, 16 and 8, to the mixer 3, and then to an SCPC transmodulator indicated by block 43. Here the upstream signal US is converted into a frequencies band compatible with the frequencies associated with a cable channel; subsequently the upstream signal US is sent to the service provider through the coaxial cable 14'. The downstream signal DS, on the contrary, is selected by the transmodulator 44, which besides the functions performed by the block 14 previously described, tunes the downstream signal DS being QAM modulated under SCPC procedure and convert it into a frequencies band corresponding to the band of the above personal channel. The downstream signal DS then reaches block 40 through blocks 3, 8, 16 and 17.

Blocks 41 and 42 may be advantageously housed in a same device; the same applies for blocks 43 and 44, which can also be contained in one device. Still more advantageously, all blocks 41, 42, 43, 44 can be housed together in a single device.

Allocation of the upstream signals US and downstream signals DS in the personal channel is shown in Fig. 7, where the hatched line S1 indicates the frequency band of the personal channel, normally 8 MHz wide; the solid line S2 represents the band occupied by the downstream signal DS to which a carrier f_1 is associated, whereas the line S3 represents the band of the upstream signal US, to which a carrier f_2 is associated.

Fig. 7 also shows some possible frequency allocations of the FSK or PSK modulated return channel, which is used, as previously mentioned, to control the blocks of the distribution system through the interface 17. In particular, the above return channel can be located in an area not occupied by the upstream signals US and the downstream signals DS, as indicated with reference number S5, or in an area where the frequency response of the personal channel is gradually reduced to zero, i.e. a so-called roll-off area, as indicated with reference number S4.

If the upstream signals US and the downstream signals DS are simultaneously available in the personal channel, i.e. when the system operates with frequency multiplexing (FDMA procedure, i.e. Frequency Division Multiplexing Access), it is clear that bands S2 and S3 should not overlap. On the other hand, if the upstream
5 signals US and the downstream signals DS are available at different times in the above personal channel, then a time multiplexing operation (TDMA procedure, i.e. Time Division Multiplexing Access) will take place.

Obviously, when the personal channel is used to receive digital television signals and/or audio signals and/or data, the user disables blocks 40, 41, 43 through the
10 interface 17 and the return channel, and switches blocks 42 and 44 to the functions already described for blocks 13 and 14, respectively.

Fig. 8 shows the diagram of a further variant embodiment of the distribution system of a plurality of digital signals in a condominium and/or community environment according to the invention. In Fig. 8, the blocks having the same reference number
15 perform the same function of the blocks already represented in Fig. 3.

In Fig. 8 a new block indicated with 51 is shown, instead of the block 18 illustrated in Fig. 3, representing an IRD receiver apt to read one or more smart cards 52, as better detailed later.

Each broadcaster or provider adopts for pay channels his own conditioned access
20 system, and therefore a particular set top box, receiver 51 and smart card 52 are necessary for the vision, which are usually supplied by the broadcaster himself.

According to the present invention, should a member of the condominium decide to make a subscription, for example, to pay channels irradiated by satellite, in addition to the devices already provided for digital channels reception from the satellite (i.e.,
25 a transponder preselector circuit 12 and a QPSK/QAM transmodulator 13, which generate his personal channel for exclusive use), he would need also need the receiver 51; said receiver, besides demodulating in QAM and decoding the signal, has also to perform the descrambling operation required to make the signal itself

usable. In order to perform the latter operation, the receiver 51 has to be fitted with a reader capable of reading the information associated with the smart card 52, which contains the electronic key necessary for enabling the use of the interactive services through descrambling. Besides information required for allowing the descrambling at the receiver 51, also the information necessary to the QPSK/QAM transmodulator 13 and the transponder preselector 12 for tuning on the channels transmitting the pay programs are inserted in the smart card 52.

Said tuning information comprise in particular the frequency of the channels to be inserted in the personal channel, where said information have to be sent to the transmodulator 13; said information also comprise the polarization type (horizontal or vertical), bit rate and frequency band (high or low) of the signals to be received, which have to be sent to the transponder preselector circuit 12. The receiver 51 transfers the above information, through the return channel, to the transponder preselector 12 and the QPSK/QAM transmodulator 13, which can thus be tuned on the channels enabled by the smart card 52. Obviously, mutual interaction between the receiver 51 and the associated smart card 52, the transponder preselector 12 and the QPSK/QAM transmodulator 13 shall be permitted, and this is obtained by a proper programming of the microprocessors controlling the above devices. For this reason, the receiver 51 and the associated smart card 52, the transponder preselector 12 and the QPSK/QAM transmodulator 13 are usually manufactured and supplied as a whole, usually on a rent basis, by the broadcaster transmitting the pay programs. In order to prevent that a user may eventually use the above QPSK/QAM transmodulator 13 also to receive pay channels transmitted by other broadcasters, a further "software electronic key" is inserted by the installer in the QPSK/QAM transmodulator 13, so that when the smart card 52 is inserted in the receiver 51, the QPSK/QAM transmodulator 13 may only be tuned on the channels enabled by the smart card 52 associated with the broadcaster supplying the devices. In other words, if a different smart card 52 which does not contain the same software electronic key

is inserted in the transmodulator 13, the transmodulator 13 operation will be inhibited. Insertion of said software electronic key, i.e. a proper digital signal, may for instance be provided using a serial port of the microprocessor controlling the QPSK/QAM transmodulator 13, such a port being accessible through a connector
5 from outside the QPSK/QAM transmodulator 13. Obviously, if no smart card 52 is inserted in the receiver 51, the system may be tuned on any free access channel.

Furthermore, with a view to protect the privacy of more condominium users subscribing the same program, the system according to the invention provides that the frequency of one's personal channel can be inserted, for example by the installer,
10 in each user's smart card 52, so that the receiver 51 will only receive the signal in said personal channel. Thus, even if any user is able to receive the personal channel of another user in his own receiver 51, for example by tampering the selective channel-pass filter 16, said receiver 51 controlled by the smart card 52 would not be able to proceed to descrambling and decoding.

15 The above situation can be easily extended to a situation where pay channels are transmitted by cable, i.e. digital signals CATV (Cable TV) modulated in QAM being received through the coaxial cable 14' or through digital terrestrial television signals modulated in COFDM (Coded Orthogonal Frequency Division Multiplexing) being received through the aerial 19. In such circumstances, the smart card 52
20 contains tuning information for the respective transmodulators 14 and 20.

It is obvious that many changes are possible to the system according to the present invention, without departing from the novelty spirit of the inventive idea.

For instance, the return-channel can be radio frequency irradiated, instead of being transmitted by cable; in this case, blocks 12, 13, 14 and 20 have to be equipped with
25 appropriate known radiofrequency reception devices.

Additionally, the block 14 may provide for the possibility of demodulating and remodulating the QAM signal, for recovering the bit error rate introduced by the cable distribution.

Also, distribution to buildings or single flats may be obtained in a “wireless” configuration, i.e. without cables, using networks known as MMDS (Multi-channel Multipoint Distribution System) and LMDS (Local Multipoint Distribution System).

Also in this instance, the signals from various sources are received by a sole
5 equipment, consisting for example of blocks 1, 2, 3, 4, 12, 13, 14, 19, 20 of Fig. 3; the output signal of the mixer is then converted to high frequency (up to about 40 GHz) and then irradiated. The signal is received by known reception devices in the various buildings or also in the individual flats, is reconverted in the 47-862 MHz range and then distributed by cable as done at the mixer output 3 shown in Fig. 3.

10 The presence of the band-stop filter 15 may also be used not only for the filtering of the signals distributed by the system, but also to filter likely signals eventually available on a distribution network inside the flat. In fact, household distribution networks of both radio-television, information, operation and control signals are known, which often employ the same physical means used for the distribution of
15 radio-television signals received from satellite, cable or aerial. Therefore, a suitable configuration of the band-stop filter 15 will prevent signals outcoming from inside the flat and their pick-up by other system users.

Moreover, if the CATV signal has a low bit error rate, the block 33 can be omitted in the universal transmodulator 29; in this instance the signal directly passes from the
20 QAM tuner to the commutator 36; in this case, the latter needs a further output directly to the converter 28, which has to be used should the user select a QAM channel.

Moreover, tuners 30, 32, 34, or at least two of them, may be integrated in one extended band tuner, for example from 5 to 2150 MHz, containing inside the suitable
25 filters and switching devices for selecting the input signal.

Demodulators 31, 33, 35, or at least two of them, can be obtained in one integrated circuit; similarly, also blocks 31, 33, 35, 36, 37 can be contained in a single integrated circuit.

The user terminal 17 can be an independent block, or be contained in the QAM tuner of the IRD receiver 18.

Furthermore, instead of using either the cable or the satellite as described above for both the upstream e downstream signals, the upstream channel can be sent by cable and the downstream signal received from the satellite, or viceversa. On the other hand the upstream signal, which as said is usually transmitted with a low bit rate, can be sent by telephone through a modem connected to the block 40, according to well-known techniques.

Moreover, SCPC transmodulators can comprise a device for storing transit data, commonly called buffer, wherein the incoming upstream signals are stored; the signals are sent when said buffer is substantially fully occupied by signals. In this instance, upstream signals may come from more personal channels, for instance when a number of users agrees to use one sole SCPC transmodulator for sending the signals e.g. by satellite. For example, tuning information contained in the smart card may be changed by the broadcaster, because the transponder frequency has changed, or new services have been purchased by the user, or the services transmission mode has changed, e.g. from MCPC to SCPC or viceversa. In this instance, the reception devices automatically fit the new situation through the instructions received from the smart card. The new data can be sent by a modem, usually incorporated in the receiver, or through the so-called Service Information (SI), i.e. service information expressly inserted in the digital signal transmitted.

It is clear that the receiver has to be equipped with a write device, among those known in the digital technology, for data insertion in the EEPROM memory of the smart card.

CLAIMS

1. A system for the distribution to a condominium and/or community environment of a plurality of television signals, and/or audio signals, and/or digital audio and/or video signals, in particular being transmitted according to different standards, comprising means (1,4,14',19) for receiving said signals transmitted
5 through the air, and/or from satellite, and/or by cable, means (2,5,7) for the amplification and the frequency conversion of said signals, and means (3,8) for the distribution of said signals, characterized in that one or more digital signals can be received by a single user of the system through a frequency conversion in a predetermined channel which can be accessed by said user only, and in that the
10 digital signal being present in said channel can be selected by said user through control means (11,17,18;40;51) which send a control signal to selection means (12,13,14,20;29;41,42,43,44).

2. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the digital signal being
15 present in said channel always has the same type of modulation (QAM).

3. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the means (3,8) for the distribution of said signals comprise a distribution support (8) realized by means of a coaxial cable.

20 4. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the means (3,8) for the distribution of said signals comprise MMDS and/or LMDS networks.

5. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that said predetermined channel
25 is 8 MHz wide.

6. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the digital signal being

present in said predetermined channel is QAM modulated.

7. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that said predetermined channel is contained in a frequency band being comprised between 47 to 862 MHz.

5 8. A system for the distribution to a condominium and/or community environment, according to claim 7, characterized in that said frequency band ranges preferably from 230 to 445 MHz.

10 9. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that filter means (15,16) are provided, which operate where the signal distribution means (3,8) distribute the signals to the single user.

15 10. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the signals, prior to their distribution to the single user, pass through a band-stop filter (15) so that the reception of the signals contained in said band by a receiver (18) associated with the single user is eliminated.

20 11. A system for the distribution to a condominium and/or community environment, according to claim 10, characterized in that a channel-pass filter (16) is arranged in parallel to said band-stop filter, which is apt to let the predetermined channel pass through to the single user.

12. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the selection of the digital signal to be converted in said predetermined channel is performed by a return-channel.

25 13. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return-channel is FSK modulated.

14. A system for the distribution to a condominium and/or community

environment, according to claim 12, characterized in that said return-channel is PSK modulated.

15 15. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return-channel is QPSK modulated.

16. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return channel is QAM modulated.

10 17. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return channel is bi-directional under TDMA procedure.

18. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return channel has a band width of 128 KHz or multiples of it.

15 19. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return channel is comprised between 41 and 46.5 MHz.

20 20. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return channel uses the same coaxial cable of the system.

21. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that the return channel used by a user is not accessible to all other users of the system.

25 22. A system for the distribution to a condominium and/or community environment, according to claim 12, characterized in that said return-channel is radiofrequency irradiated.

23. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the selection, the modulation

and the frequency conversion in a predetermined channel of the digital signal are obtained by means of a transmodulator (13,20;29;41,42,43,44).

24. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that a user terminal (17) and an
5 IRD receiver-decoder (18;40;51) are provided, which can be operated by a same remote-control (11).

25. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that it comprises a set of aerials (1,4,19) for the reception of both analog and digital radio/television signals, means
10 (2,5,7) for the amplification and the frequency conversion of said signals, transmodulator means (13,20), at least a band-stop filter (15), a signals mixer (3), at least a transponder preselection circuit (12), a selection circuit of digital signals by cable (14), at least a channel-pass filter (16) arranged in parallel to said band-stop filter (15), at least a user terminal (17) to which there are associated at least:
15 - a remote control device (11),
- an IRD receiver-decoder (18),
- an image display (10).

26. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the selection means (12,13,
20 14,20;29;41,42,43,44), the amplification and frequency conversion means (2,5,7) of said signals, and the distribution means (3,8) of said signals demodulate digital signals having different transmission standards and remodulate them according to a sole type of modulation (QAM) for then distribute them to the users of the system by means of a sole distribution support (8).

25 27. A system for the distribution of a plurality of radio-television signals (1,4,14;19) transmitted by air and/or from satellite and/or by cable, comprising means for the picking up and/or the reception of said signals, means for the amplification of said signals and means for the distribution of said signals,

characterized in that filter means (15) are provided to prevent a passage of a portion of said signals (digital signals) to all the users of the system, and filter means (16) for allowing the passage of said portion of said signals (digital signals) only to one or more of said users.

5 28. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that two or more selection means (13,14,20) are contained in a sole transmodulator device (29).

10 29. A system for the distribution to a condominium and/or community environment, according to claim 28, characterized in that said sole transmodulator device (29) comprises tuner means (30,32,34), which are apt to perform the selection of said digital signals within at least two frequency ranges, and demodulation means (31,33,35), which are apt to demodulate at least two of said digital signals transmitted with different standards.

15 30. A system for the distribution to a condominium and/or community environment, according to claim 29, characterized in that said transmodulator device (29) includes at least two tuners (30,32,34) for the selection of digital signals, and at least two demodulators (31,33,35) of said digital signals.

20 31. A system for the distribution to a condominium and/or community environment, according to claim 29, characterized in that said transmodulator device (29) also includes a commutator (36) apt for receiving the digital signals coming from said demodulators (31,33,35).

25 32. A system for the distribution to a condominium and/or community environment, according to claim 29, characterized in that said transmodulator device (29) also comprises a modulator (37) for remodulating the output signal of the commutator (36).

 33. A system for the distribution to a condominium and/or community environment, according to claim 29, characterized in that said transmodulator device (29) also includes a converter (38) for converting in frequency the output signal of

said modulator (37) into a predetermined channel.

34. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that said control means (11,17,18;40) are also apt to generate one or more digital signals in transmission or
5 upstream signals (US) and convert them in frequency into the predetermined channel which can be accessed by said user only, and that second selection and handling means (41,43) are provided for said digital signals in transmission, and means (4,14') for the transmission of said upstream signals (US) from satellite and/or by cable.

35. A system for the distribution to a condominium and/or community
10 environment, according to claim 34, characterized in that the selection means (42,44) and the second selection means (41,43) operate on the received downstream signals (DS) or on upstream signals (US) QAM modulated under SCPC procedure, respectively.

36. A system for the distribution to a condominium and/or community
15 environment, according to claim 34, characterized in that said predetermined channel which can be accessed by said user only is used under FDMA procedure, i.e. the upstream signals (US) and downstream signals (DS) are simultaneously present in said predetermined channel.

37. A system for the distribution to a condominium and/or community
20 environment, according to claim 36, characterized in that in said predetermined channel which can be accessed by said user only both the upstream signals (US) and the downstream signals (DS) occupy not overlapping frequency bands.

38. A system for the distribution to a condominium and/or community
25 environment, according to claim 34, characterized in that the predetermined channel which can be accessed by said user only is used under TDMA procedure, i.e. both the upstream signals (US) and the downstream signals (DS) are not simultaneously present in the predetermined channel.

39. A system for the distribution to a condominium and/or community

environment, according to claim 34, characterized in that said selection means (42,44) and said second selection and handling means (41,43) are comprised in a single container.

40. A system for the distribution to a condominium and/or community environment, according to claim 1, characterized in that the control means (21), for performing an access function to a plurality of conditioned access services, are apt to read the information contained in a smart card (52), and that that said information contained in said smart card (52) control the selection of said predetermined channel which can be accessed by said user only.

41. A system for the distribution to a condominium and/or community environment, according to claim 40, characterized in that said information contained in the smart card (52) comprise information for tuning transmodulator means (13,14,20;29;41,42,43,44) pertaining to the selection means (12,13,14,20;29; 41,42,43,44).

42. A system for the distribution to a condominium and/or community environment, according to claim 40, characterized in that said information contained in the smart card (52) comprise information for the tuning of transponder preselection means (12) pertaining to selection means (12,13,14,20;29;41,42, 43,44).

43. A system for the distribution to a condominium and/or community environment, according to claim 43, characterized in that the information for the tuning of the transponder preselection means (12) are selection information of the bands of the channels to be tuned.

44. A system for the distribution to a condominium and/or community environment, according to claim 41, characterized in that information for the tuning of the transponder preselection means (12) are information for determining the polarization of the channels to be tuned.

45. A system for the distribution to a condominium and/or community environment, according to claim 41, characterized in that said information contained

in the smart card (52) comprise frequencies information of the channels to be tuned.

46. A system for the distribution to a condominium and/or community environment, according to claim 40, characterized in that said information contained in the smart card (52) also comprise frequency information of said channel which
5 can be accessed by said user only.

47. A system for the distribution to a condominium and/or community environment, according to claim 40, characterized in that the selection means (12,13,14,20;29;41,42,43,44) and the smart card (52) contain respective electronic keys, whose congruence enables the operation of said distribution system of a
10 plurality of signals to a condominium and/or community environment.

48. A system for the distribution to a condominium and/or community environment, according to claim 40, characterized in that the control means (51) contain a device for writing data in a program memory of a microprocessor contained in the smart card (52).

49. A system for the distribution to a condominium and/or community environment, according to claim 48, characterized in that said program memory is an EEPROM type memory.
15

50. A system for the distribution to a condominium and/or community environment, according to claim 48, characterized in that the device for writing data
20 in a program memory of a microprocessor contained in the smart card (52) operates on data sent to the control means (51) by modem.

51. A system for the distribution to a condominium and/or community environment, according to claim 48, characterized in that said device for writing data in a program memory of a microprocessor contained in the smart card (52) operates
25 on data sent to the control means (51) by means of the Service Information contained in the received digital signal.

52. A system for the distribution to a condominium and/or community environment, according to claim 27, characterized in that said filter means (15) are

apt to prevent the passage of signals generated inside a further distribution network associated to a single user, in particular being inside a dwelling or flat.

ABSTRACT

The present industrial invention concerns a system for the distribution in a condominium and/or community environment of a plurality of television signals, and/or audio signals, and/or digital audio and/or video signals transmitted with different standards. According to the invention, one or more digital signals can be received by a single user of the system by means of a frequency conversion into a predetermined channel, which can be accessed by said user only. Moreover, the digital signal being present in said channel always has the same modulation and can be selected by said user through control means which send a control signal to selection means.

5

RETURN
CHANNEL

Fig. 1A

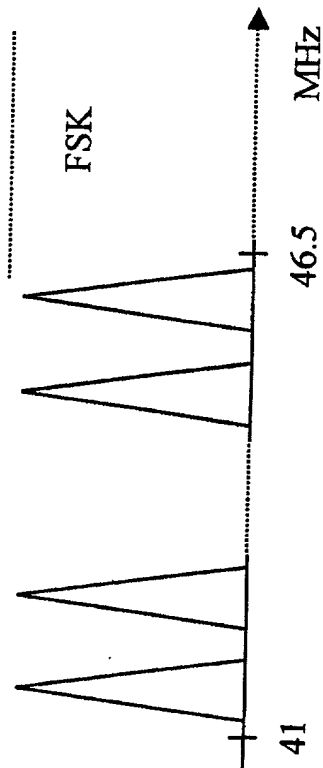
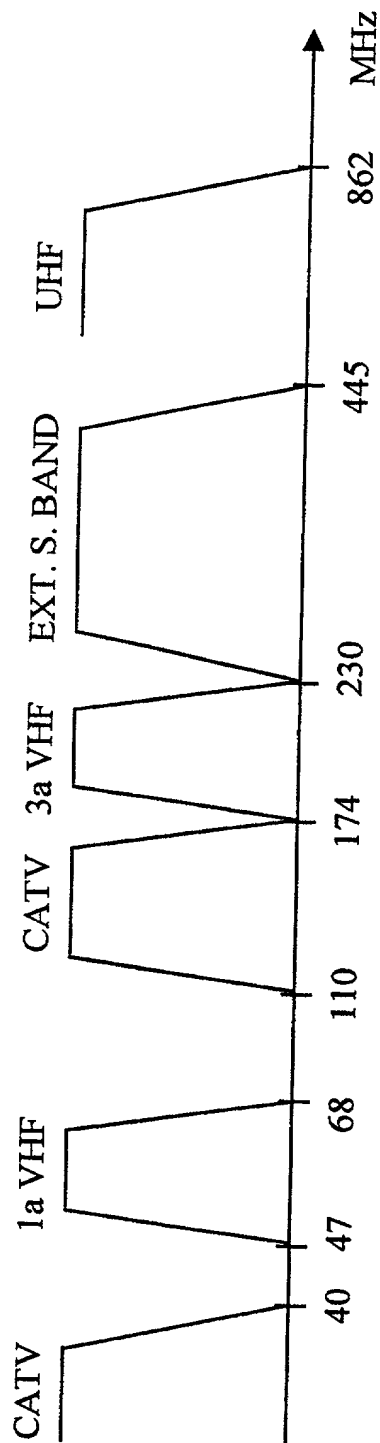


Fig. 1B

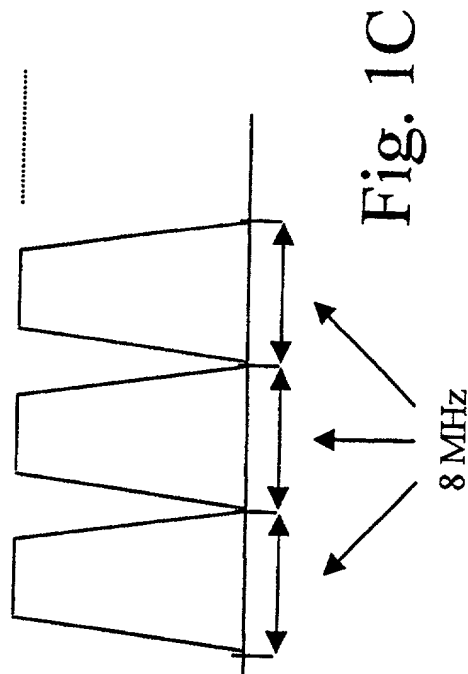
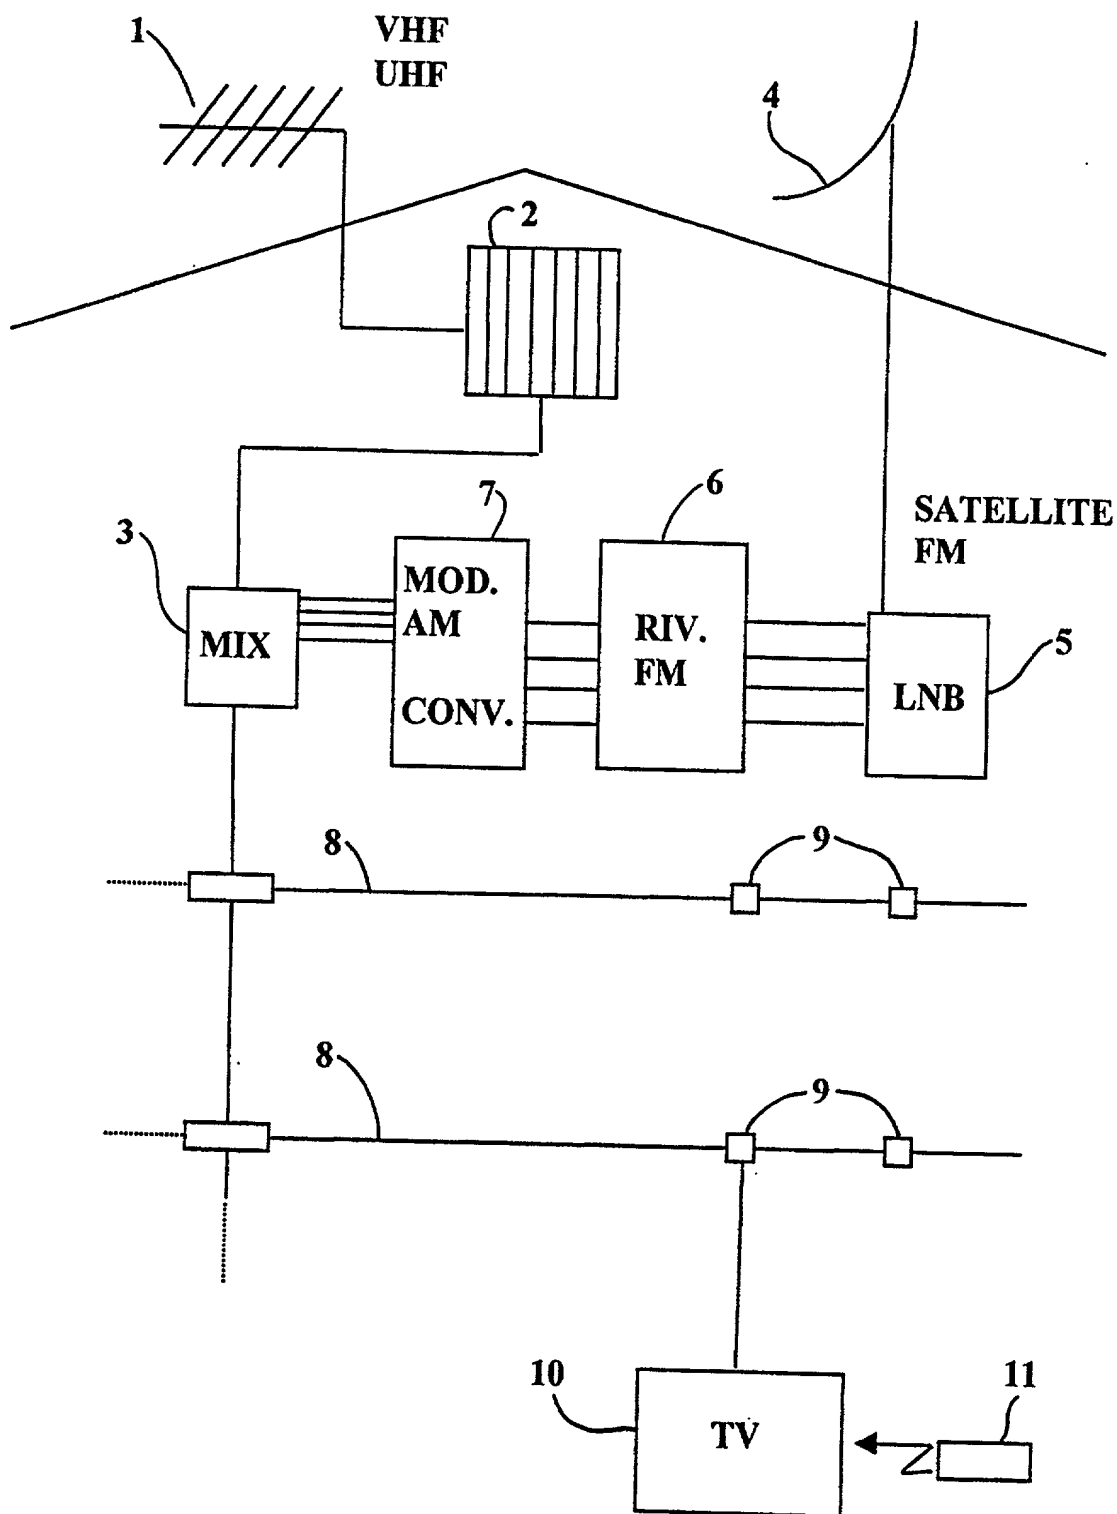


Fig. 1C

Fig. 2



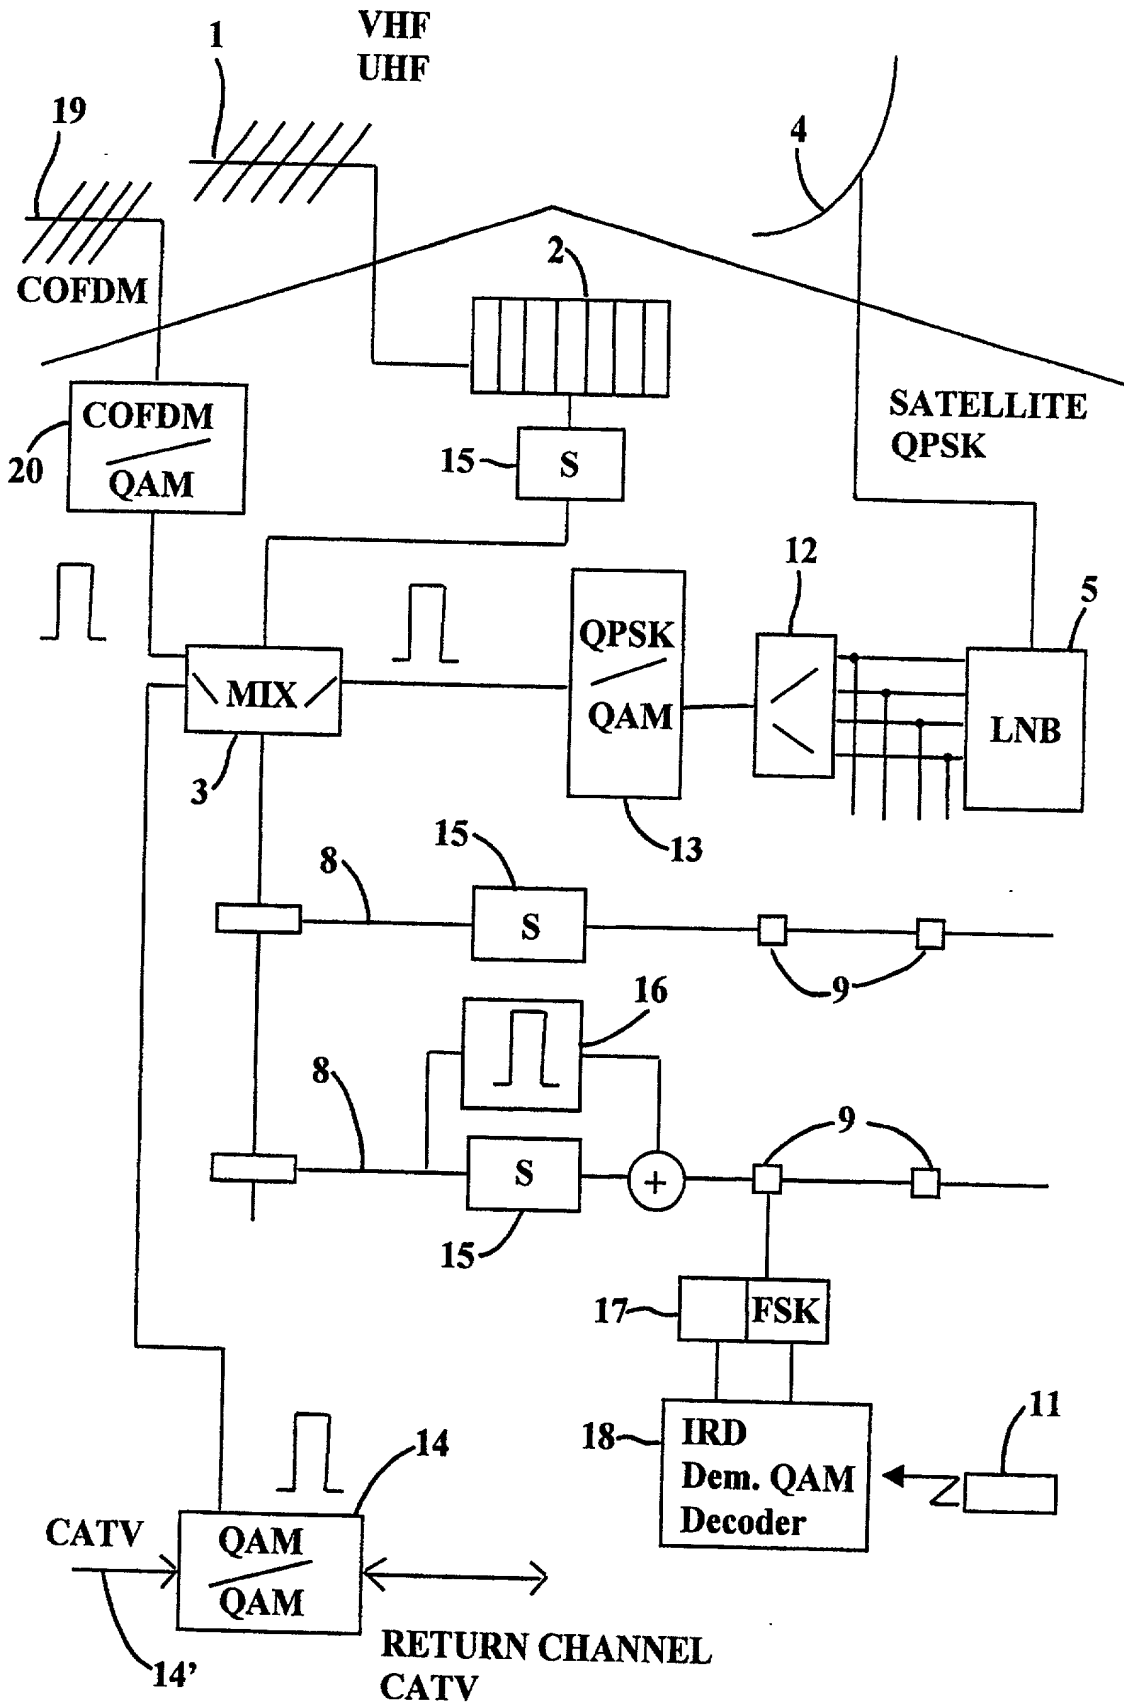
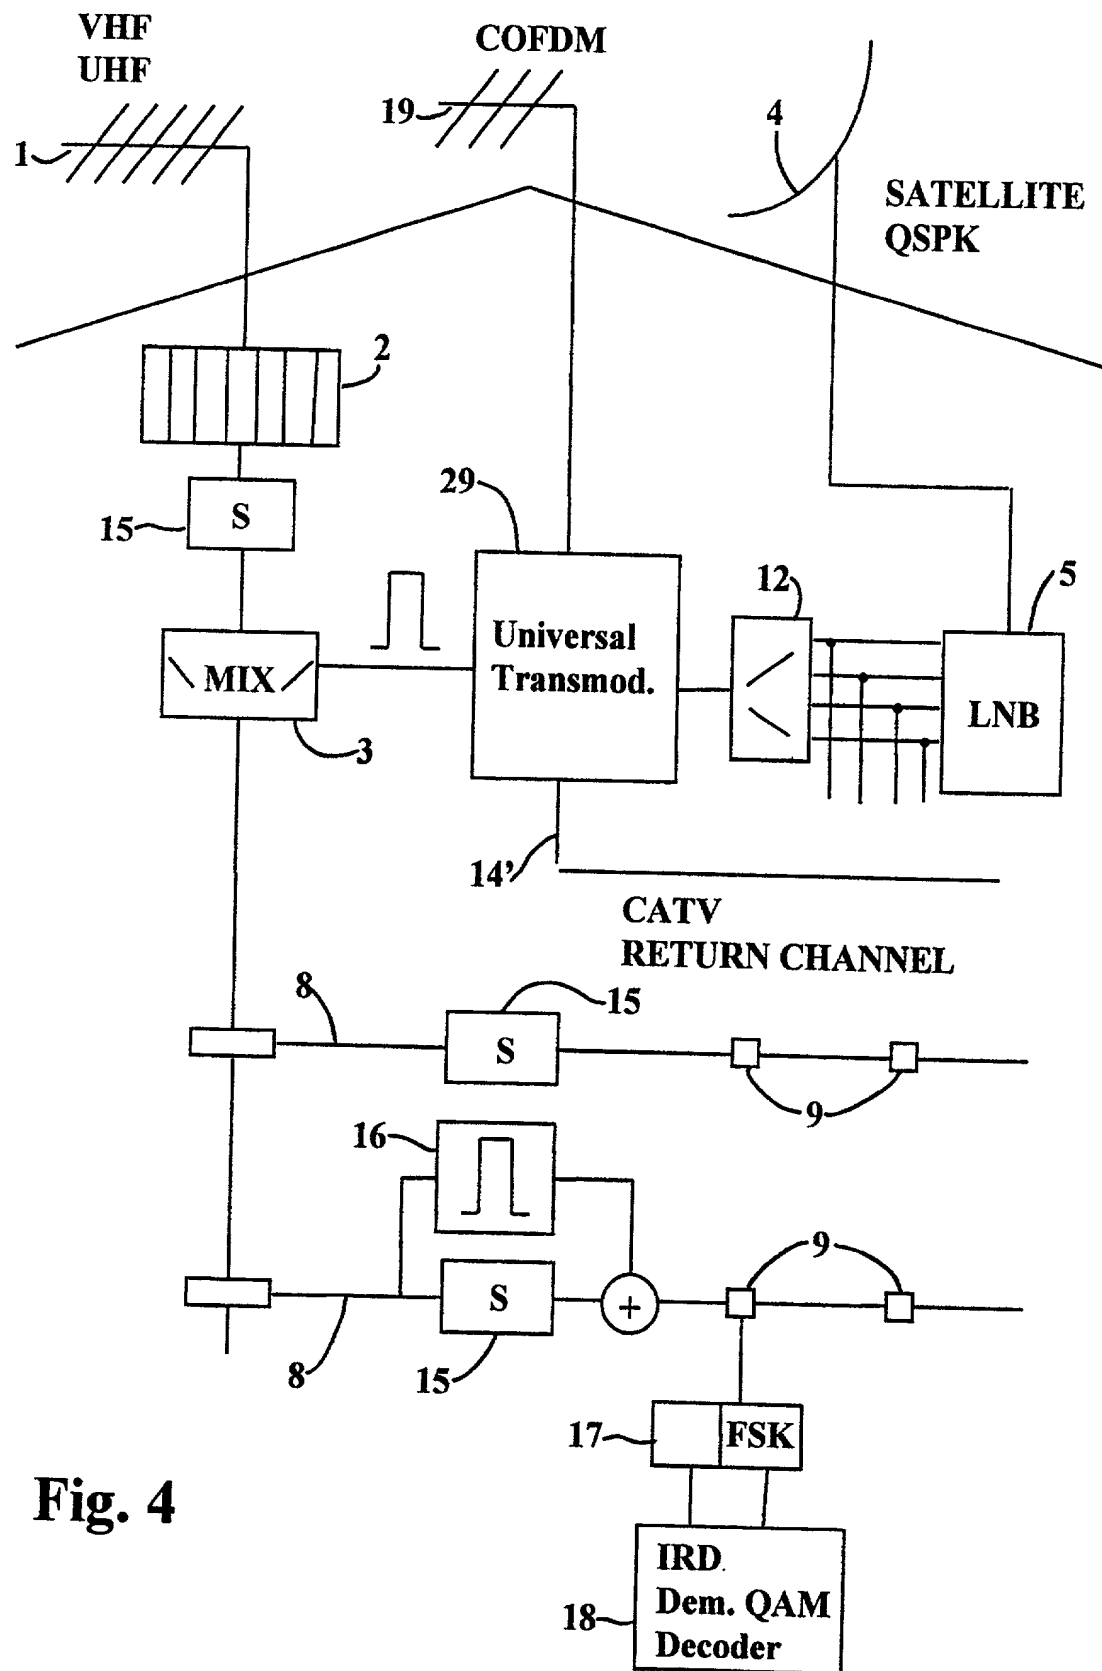


Fig. 3

**Fig. 4**

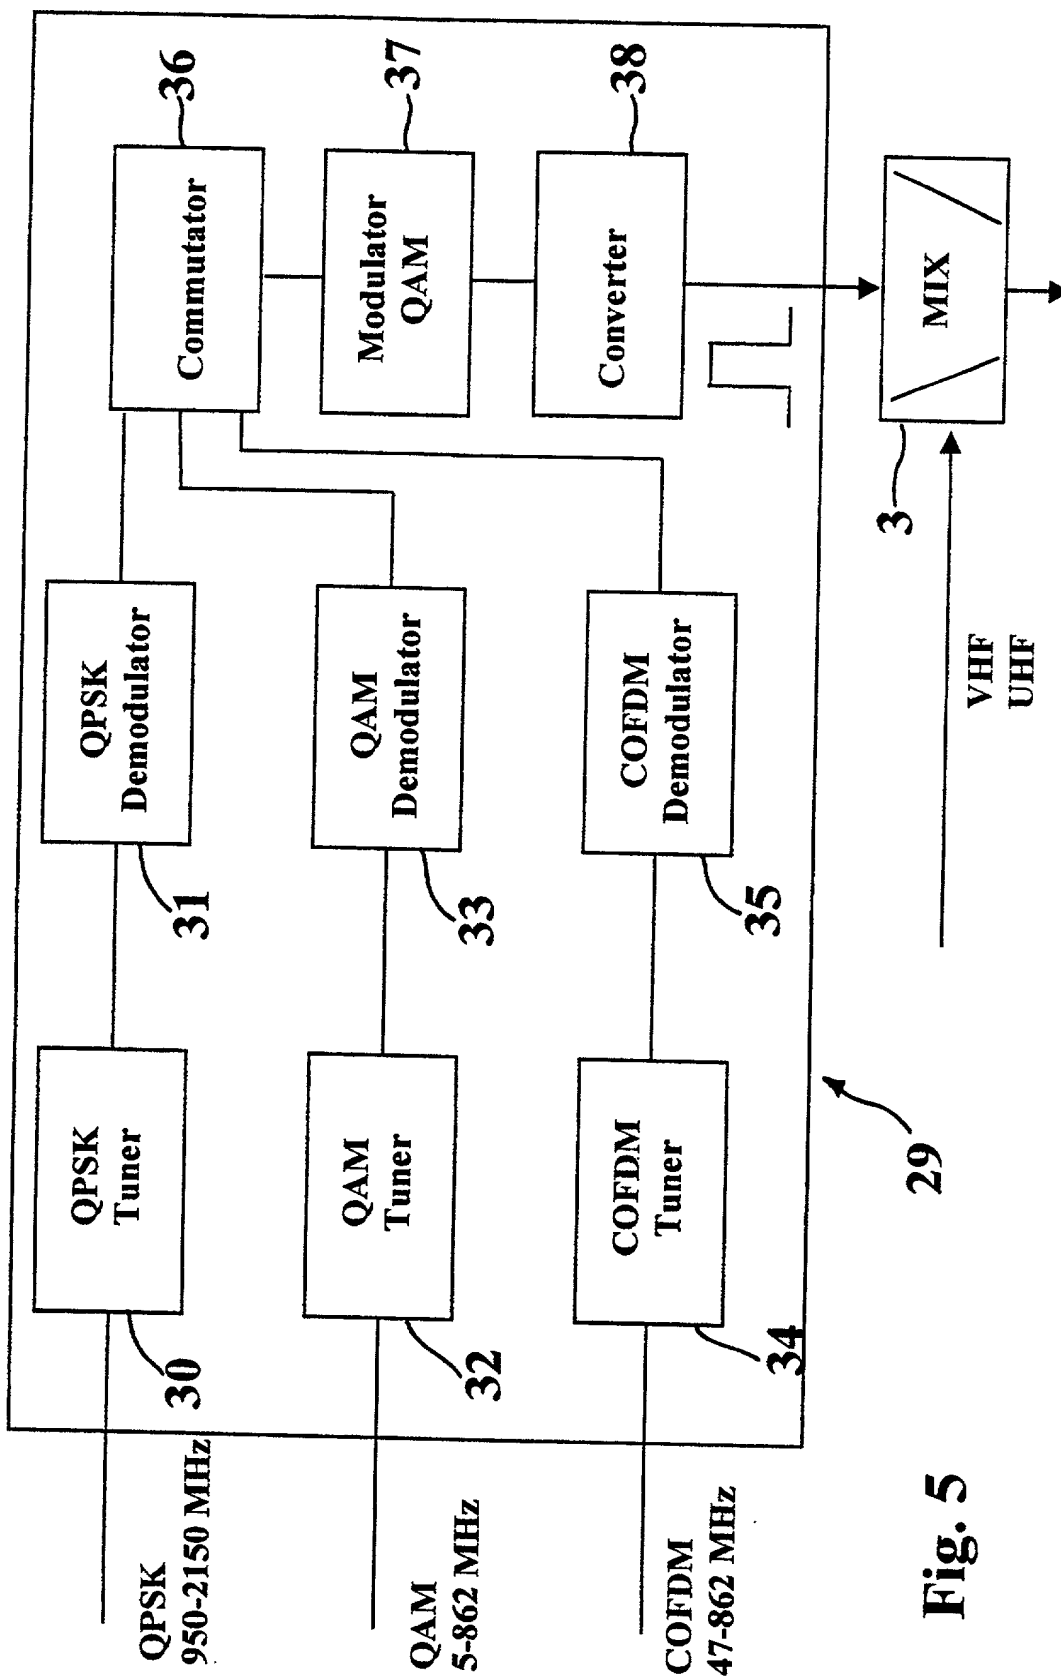


Fig. 5

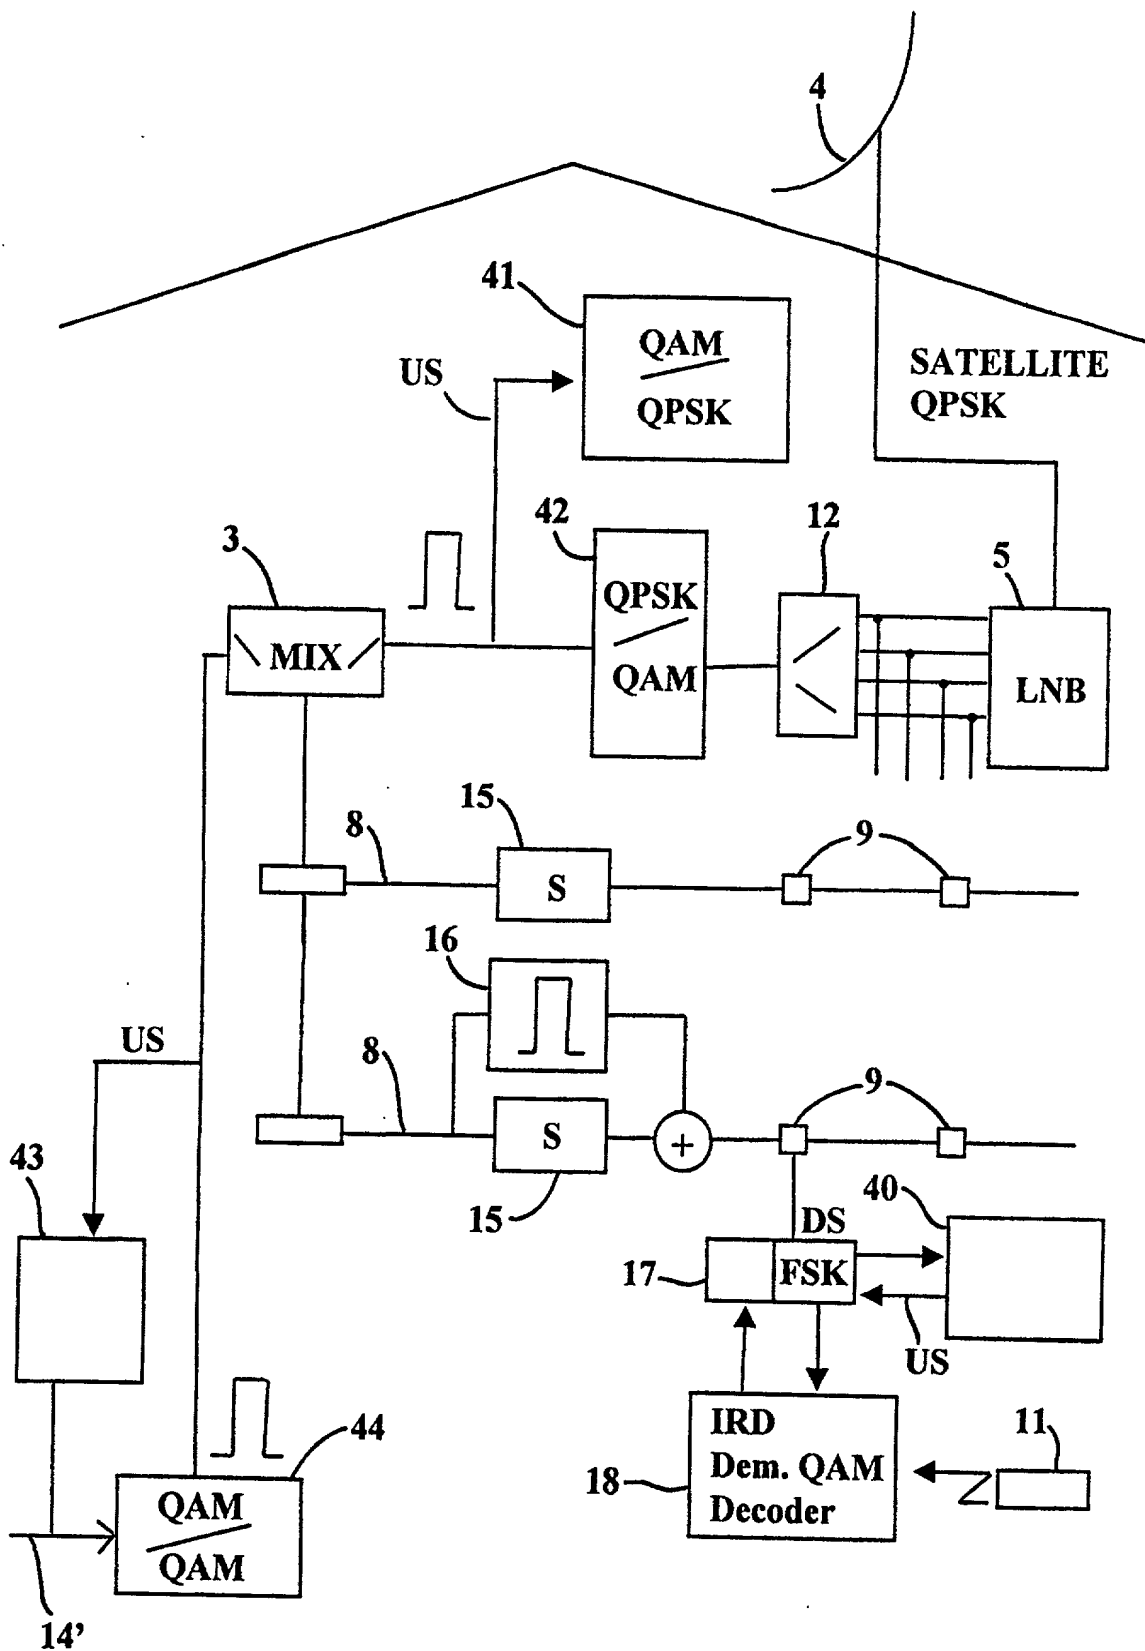


Fig. 6

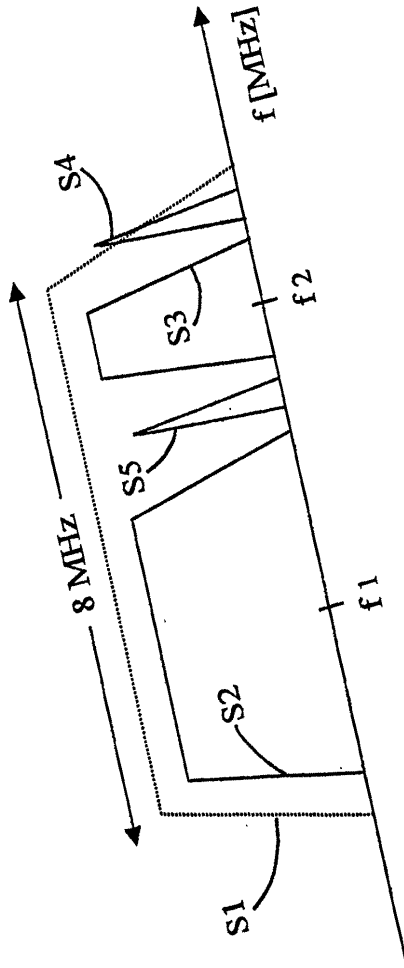
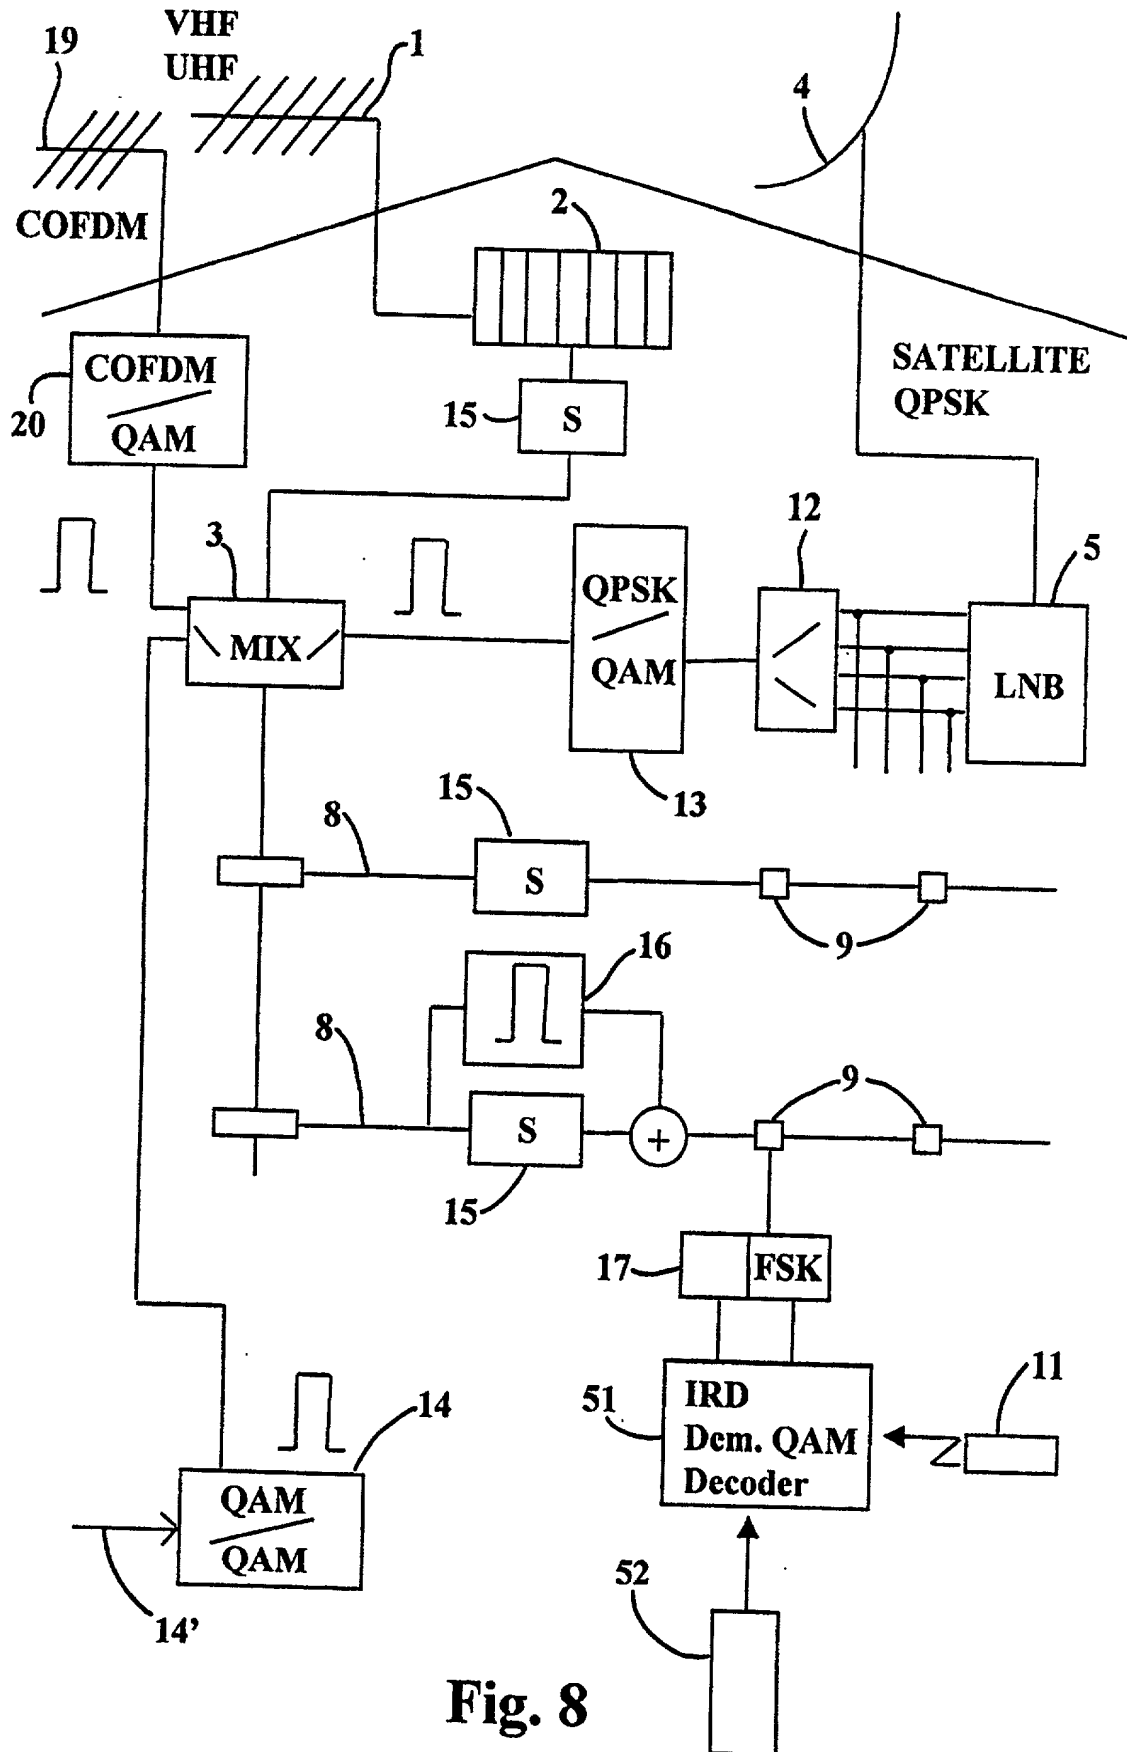


Fig. 7

**Fig. 8**

Declaration for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled Universal Signal Distribution System the specification of which was filed on January 18, 1999 as PCT International application Number PCT/IB99/00046 and was amended on May 8, 2000.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a) - (d) or 35 U.S.C. § 365 (b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT International Application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International Application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Italian Application No. TO 98A000049 filed January 20, 1998

Italian Application No. TO 98A000184 filed October 8, 1998

Italian Application No. TO 98A000967 filed November 17, 1998

Italian Application No. TO 98A001109 filed December 30, 1998

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

None

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or 35 U.S.C. § 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 35 U.S.C. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

None.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Alan H. Levine, Registration No. 19,185; Howard F. Mandelbaum, Registration No. 27,519.

Address all telephone calls to:

Alan H. Levine
Howard F. Mandelbaum
(212) 239-4162

Address all correspondence to:

Alan H. Levine
Howard F. Mandelbaum
Levine & Mandelbaum
Empire State Building
350 Fifth Avenue
Suite 7814
New York, N.Y. 10118



24235

PATENT TRADEMARK OFFICE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent is sued thereon.

Full name of inventor: Andrea Polo Filisan

Inventor's signature: Andrea Polo Filisan

Date: 17 ottobre 2000

Residence: Pordenone, Italy

ITX

Citizenship: Italy

Post Office Address: Via Pedron, 6

I-33170 Pordenone, Italy